
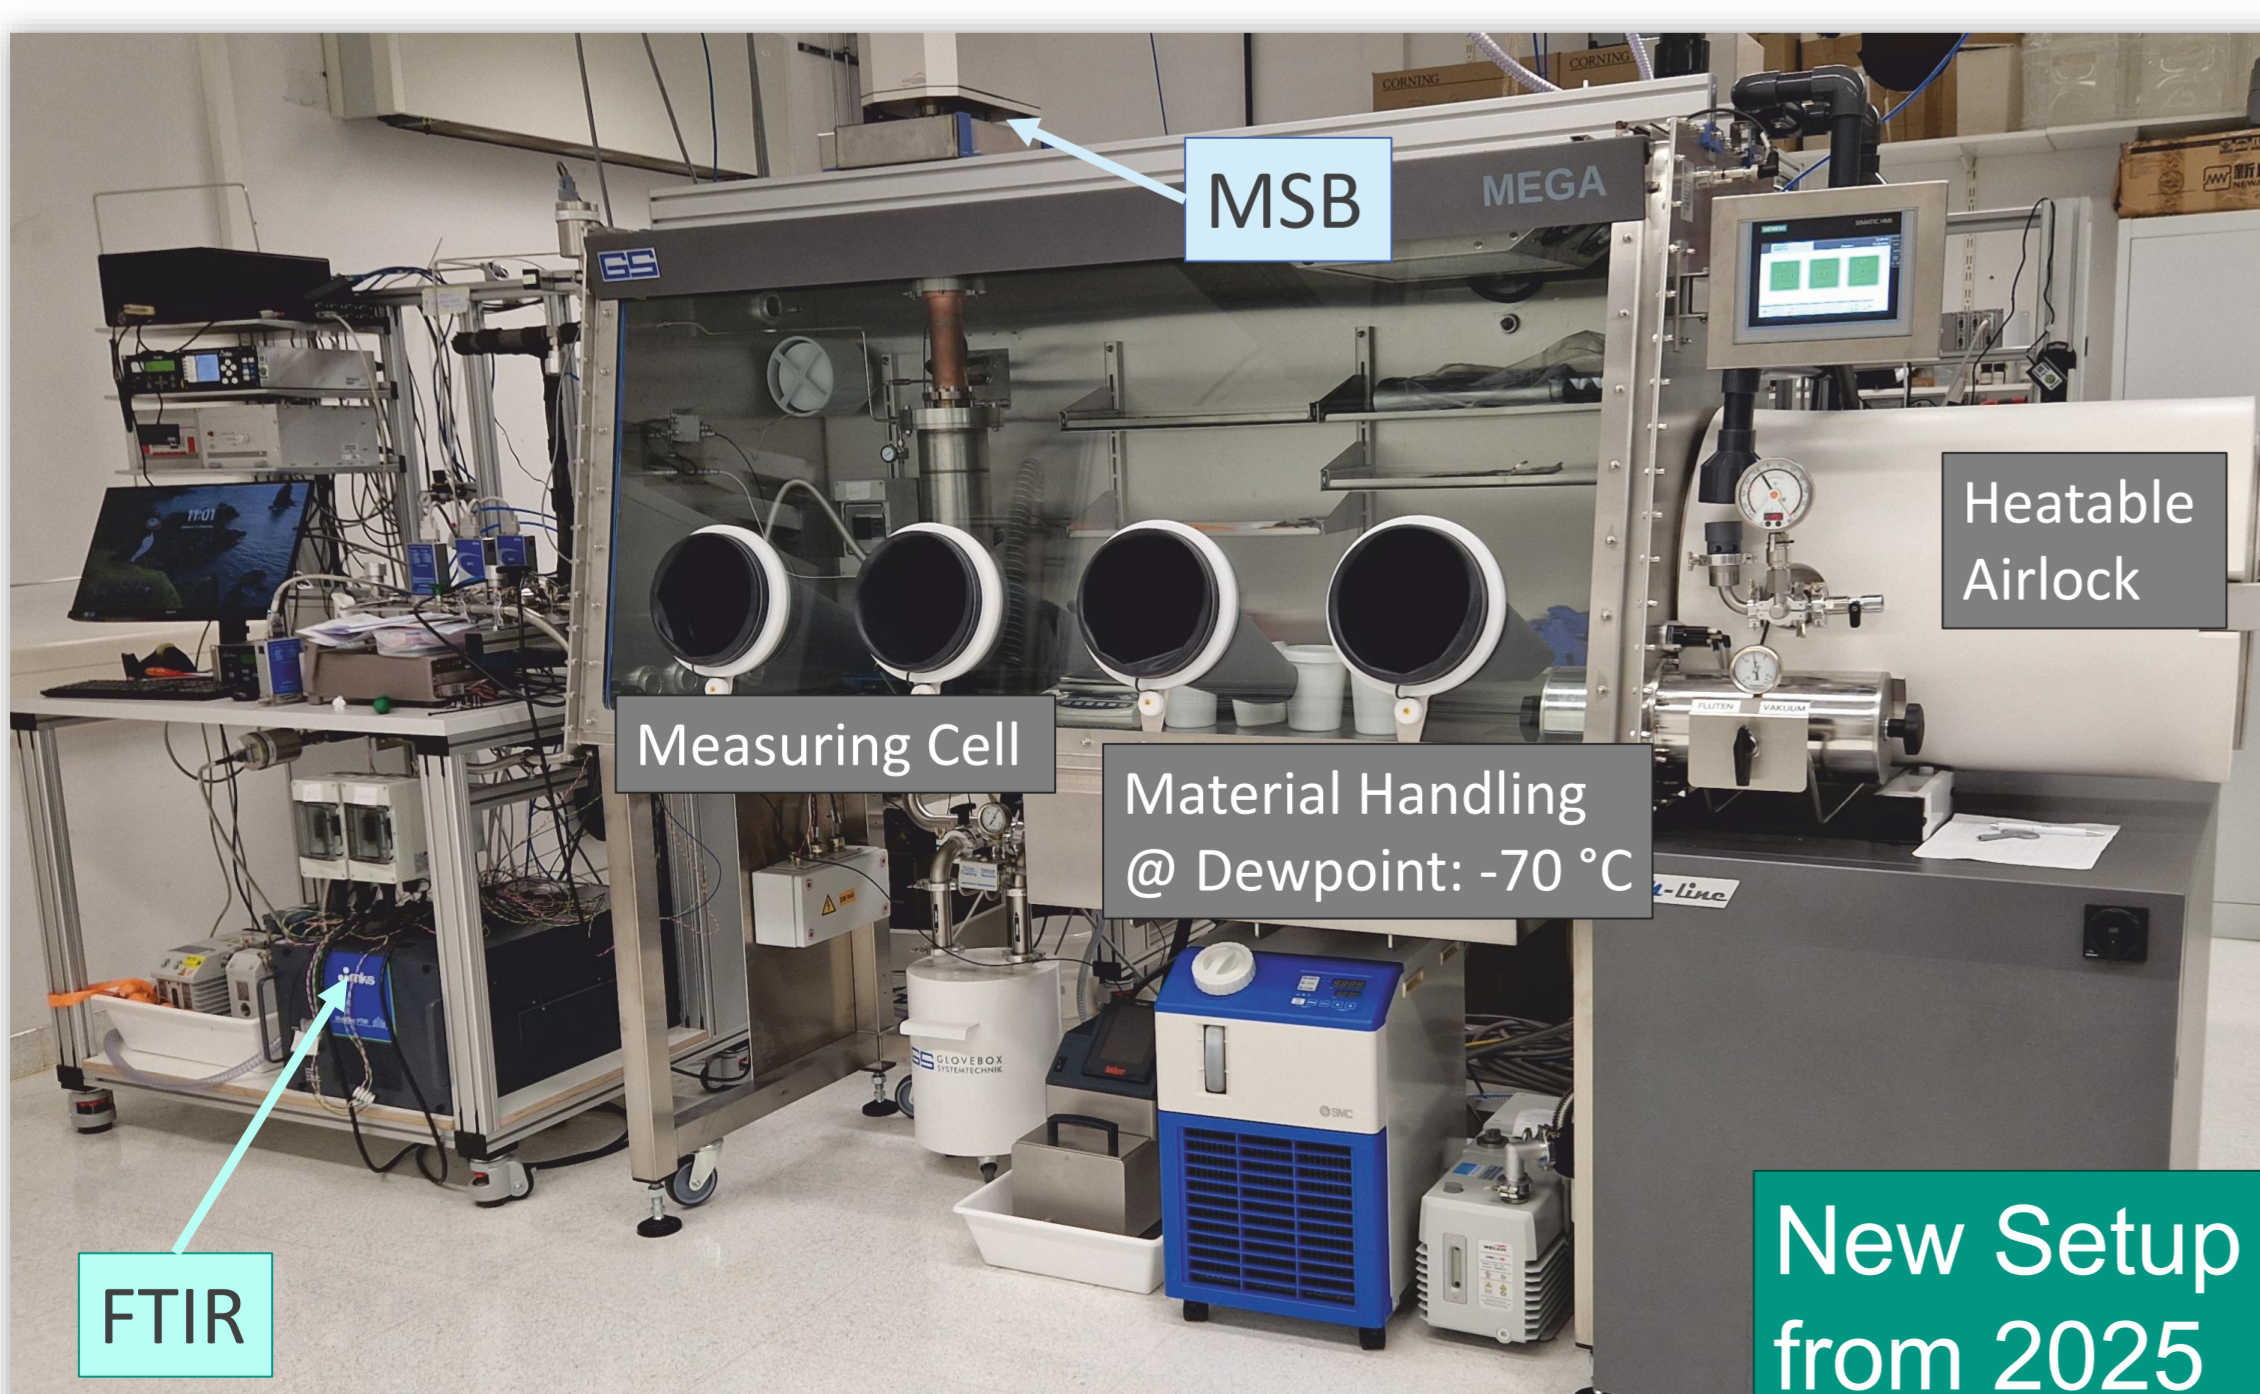
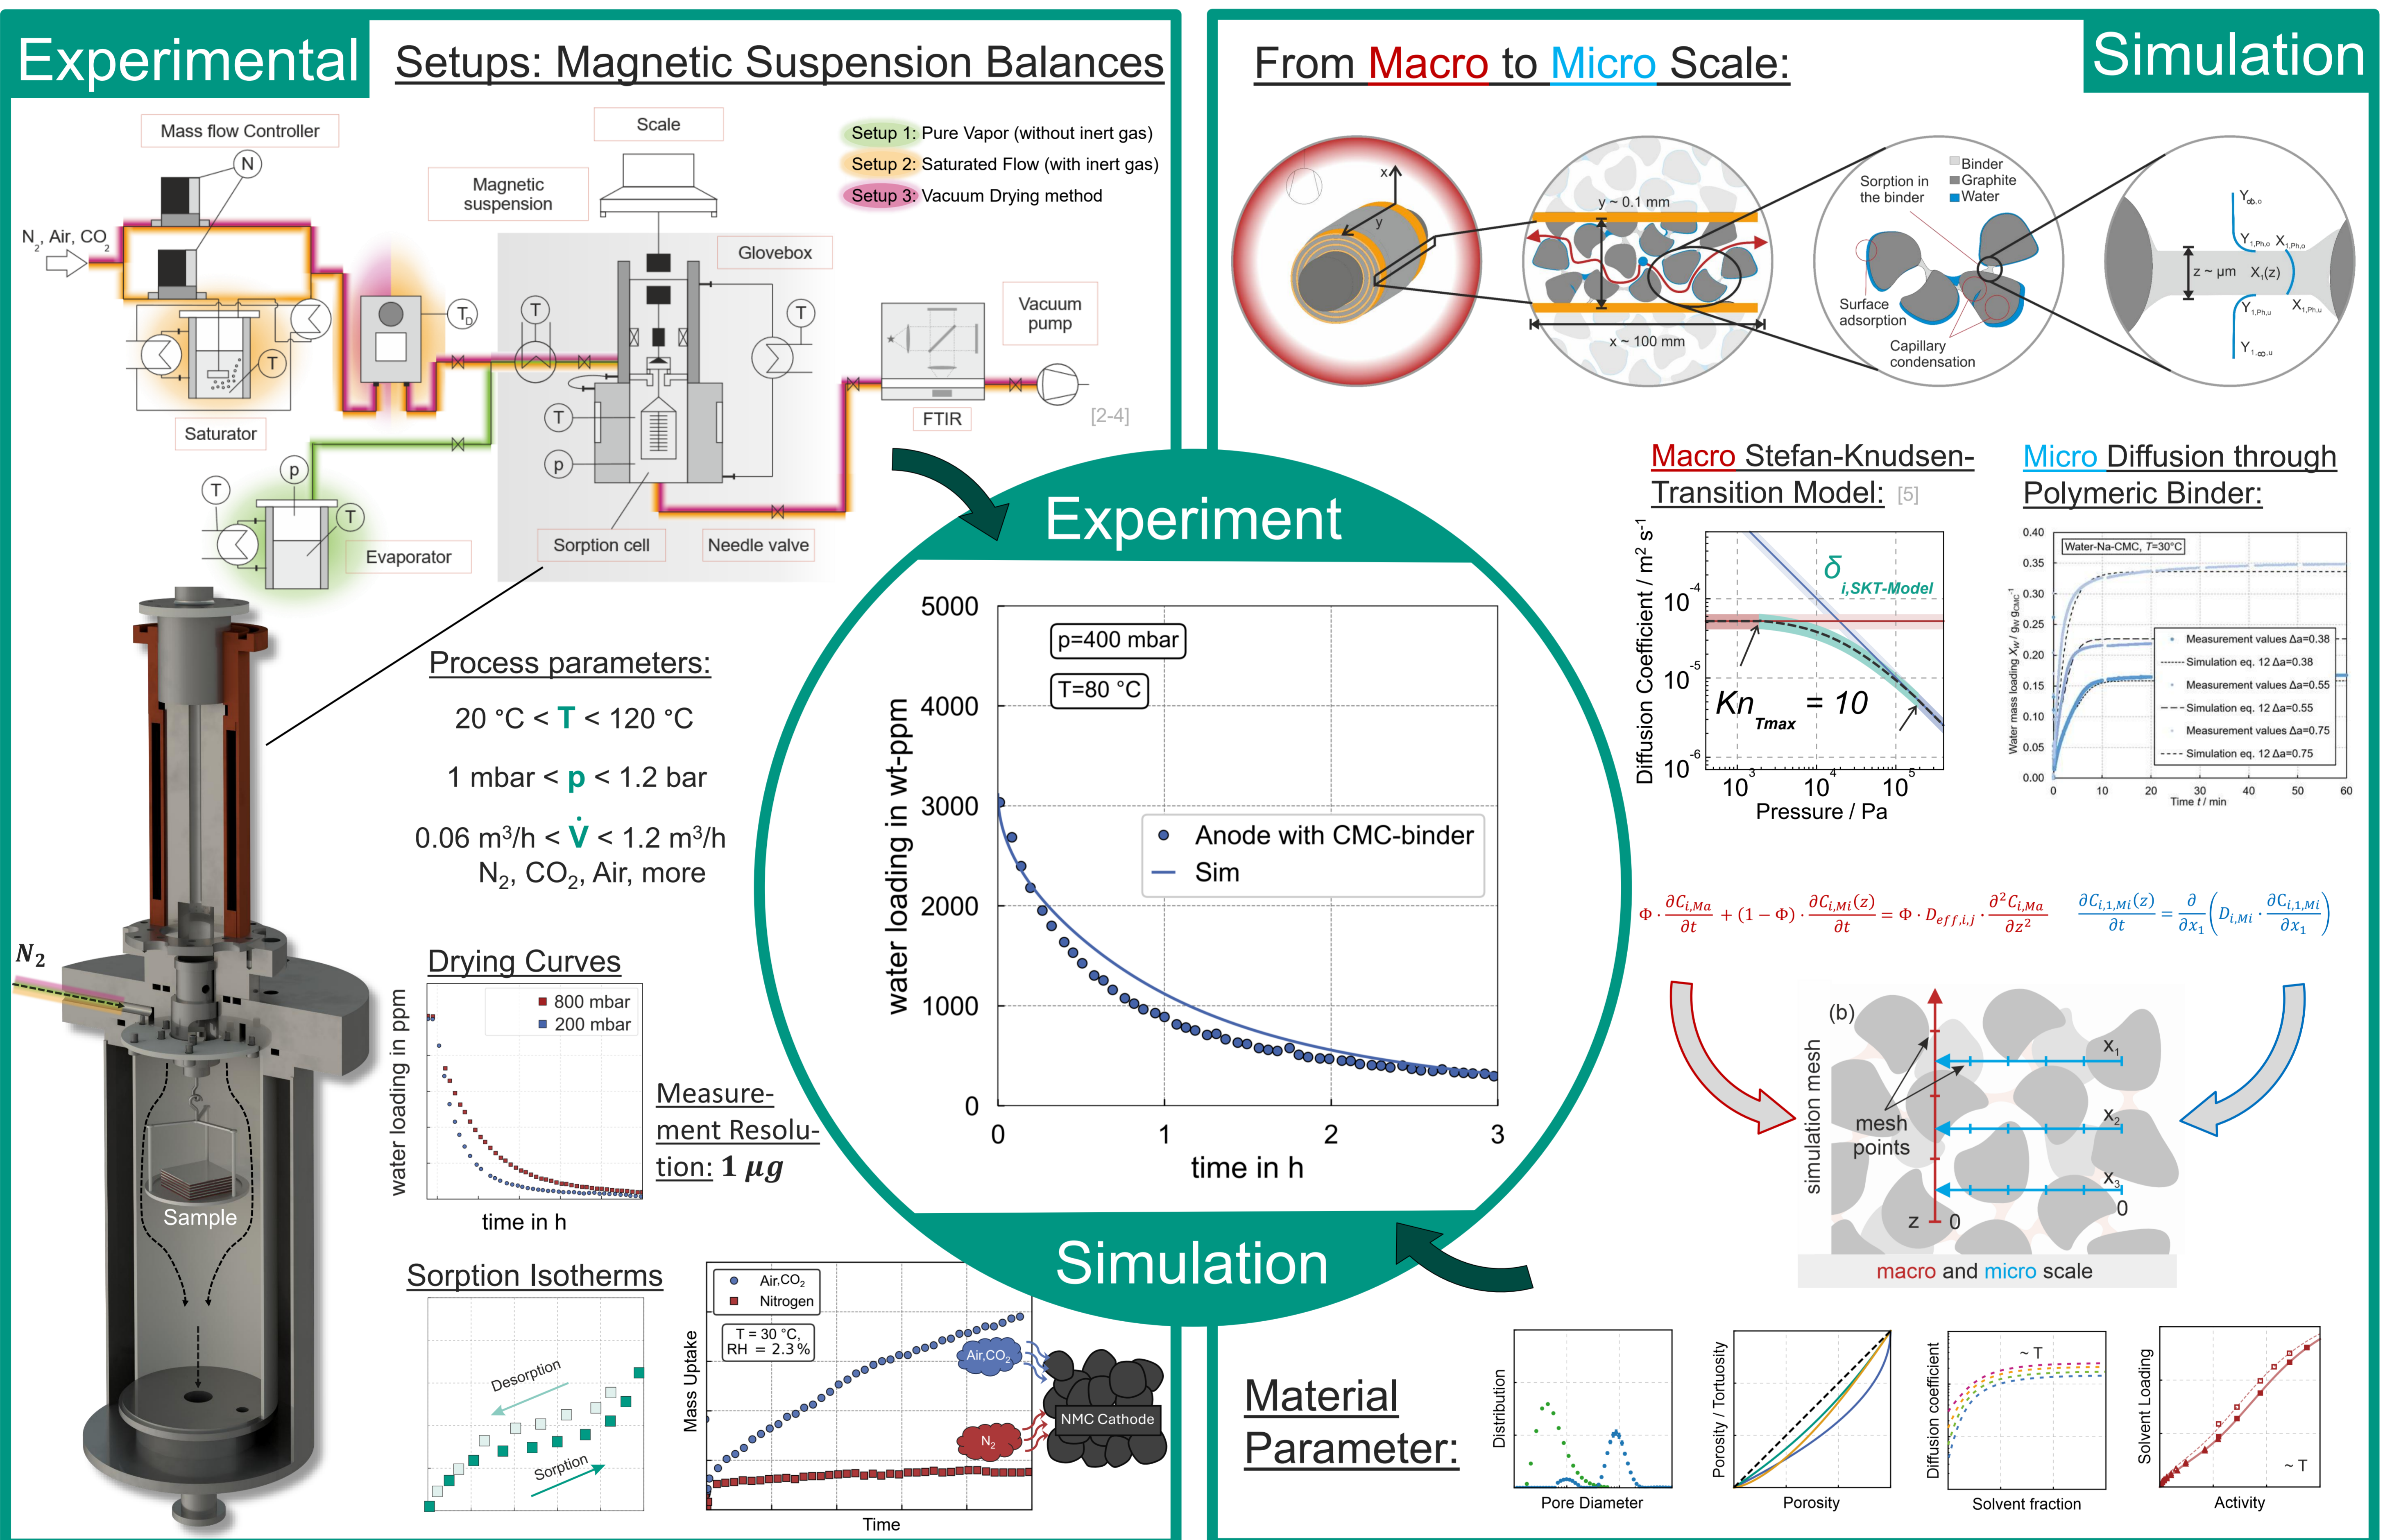


About Humidity Management and Post-Drying in Lithium-Ion Battery Production Processes – Simulations combined with unique experiments and techniques on Micro and Macro Scales

Prof. Dr. Wilhelm Schabel*, Philipp Barbig, Johannes Dörr, Thilo Heckmann, Philip Scharfer

Thin Film Technology (TFT), Karlsruhe Institute of Technology (KIT), Karlsruhe

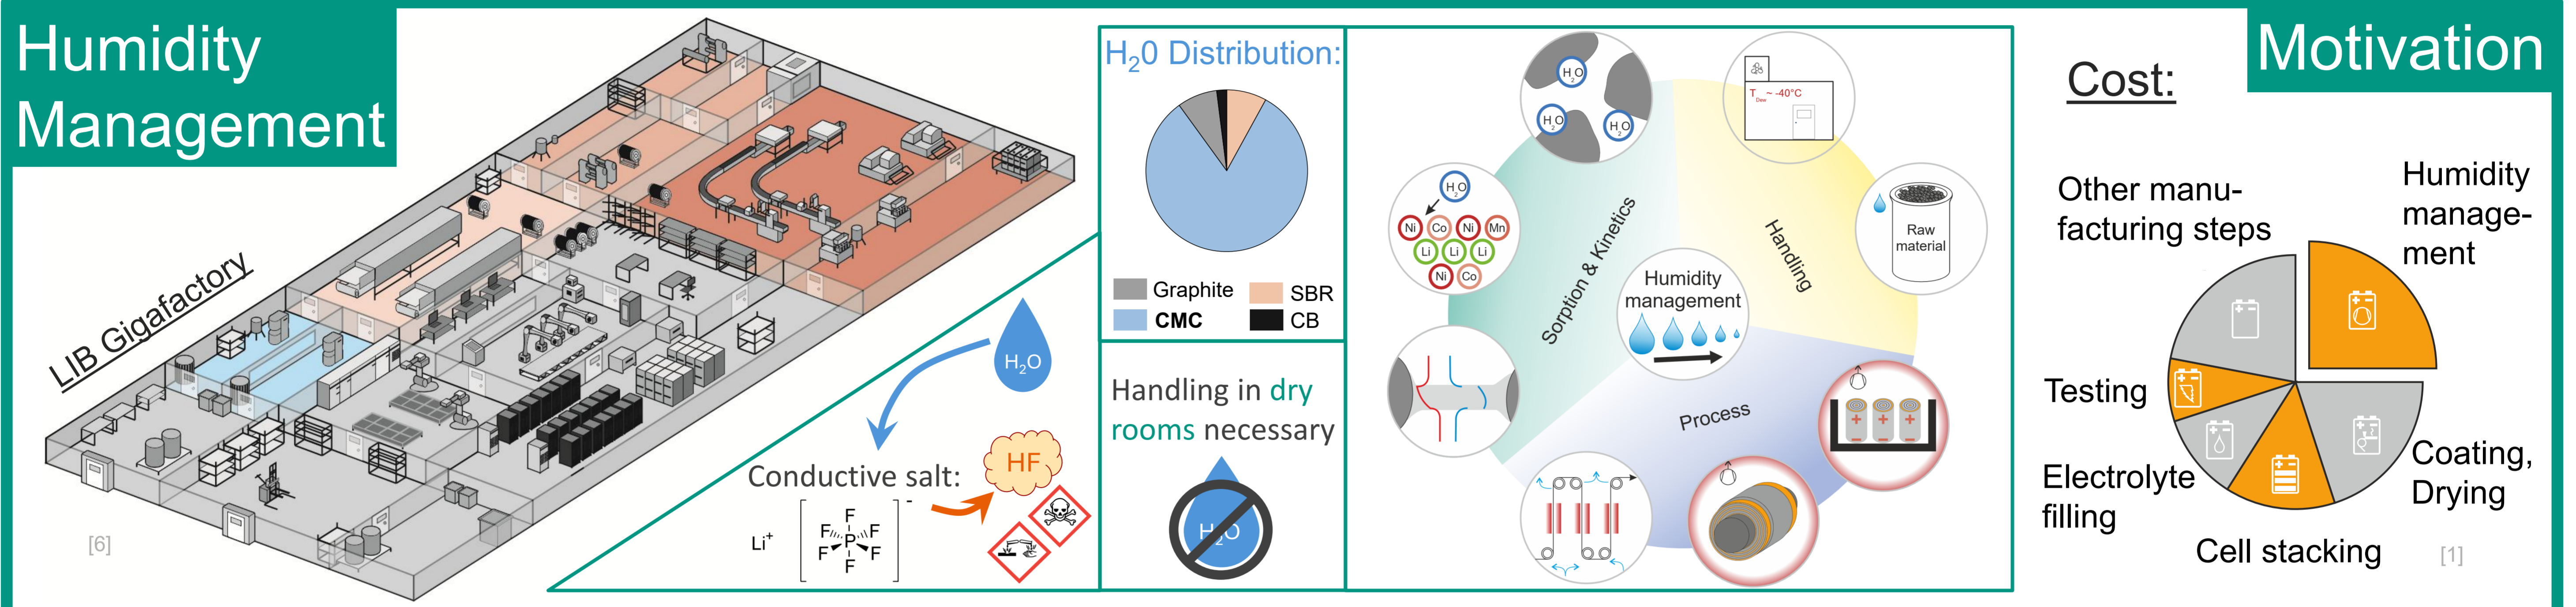

Conclusion & Outlook

- Highly flexible model for different post drying setups
- Identified critical process and material properties
- Unique experimental setup for post drying and ASSB
- Investigations on All-Solid-State-Batteries possible with new setup

- Transfer to R2R setups
- Transfer to cell baking
- Investigation in new material systems, e.g. ASSB

[1] Schünemann, J.-H.; et al.; Kwade, A. (2016) Smart Electrode Processing for Battery Cost Reduction. In: ECS Transactions, 73 (1) 153-159
 [2] Eser, J. C.; et al.; Scharfer, P.; Schabel, W. (2020) Hysteresis Behavior in the Sorption Equilibrium of Water in Anodes for Li-Ion Batteries. In: Langmuir, 36, 6193-6201
 [3] Schabel, W. et al. (2003) Messungen von Sorptionsisothermen und Diffusionskoeffizienten in Polymerlösungen. In: Chemie Ingenieur Technik, 1, 212003 (s. 36-41).
 [4] Eser, J. C.; et al.; Scharfer, P.; Schabel, W. (2020) Moisture Adsorption Behaviour in Anodes for Li-Ion Batteries. In: Energy Technology, 8, 1801162 (1-10).
 [5] Heckmann, T. et al.; Scharfer, P.; Schabel, W. (2023) Mass Transport in the Stefan-Knudsen Transition Region during Vacuum Drying [...] Resembling Battery Electrodes.
 [6] Stich, M. (2019) Wasserverunreinigungen in Lithium-Ionen-Batterien. Dissertation.
 [7] Zeier and Janek 2023: https://doi.org/10.1038/s41560-023-01208-9